


| VERSION | DESCRIPTION | DRAWN/DATE | CHECK/DATE | APPROVAL/DATE |
|---------|-------------|----------------|--------------------|--------------------|
| 1.0 | NEW RELEASE | Lei/2011/05/09 | Michael/2011/05/09 | Johnson/2011/05/09 |

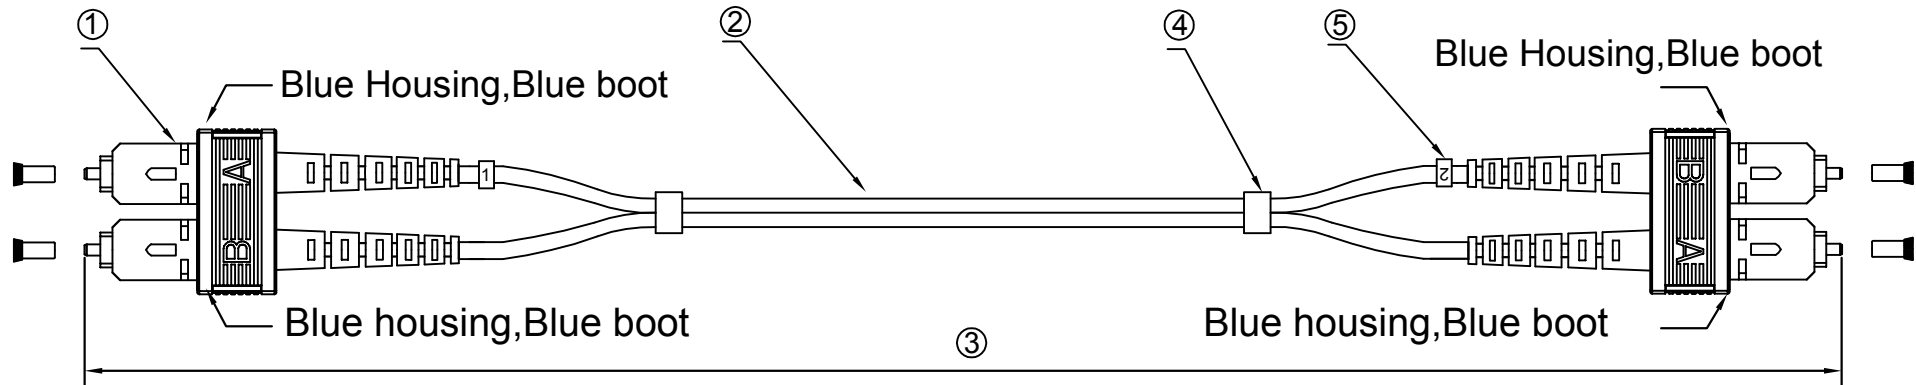

Specification:

- 1.Connector Type: SC/PC singlemode
- 2.Cable Type:
Zipcord cable,! 2.8mm. 9/125um , singlemode,
Cable Jacket : Yellow color, LSZH material
- 3.Length : xM
- 4.Shrink Tube
- 5.Cable Marker

| Part Number | Length |
|-------------|--------|
| FB-50S | 0.5M |
| FB-51S | 1M |
| FB-51S-5 | 1.5M |
| FB-52S | 2M |
| FB-53S | 3M |
| FB-54S | 4M |
| FB-55S | 5M |
| FB-57S | 7M |
| FB-510S | 10M |
| FB-515S | 15M |
| FB-5xxS | xxM |

Performance:

- a. Insertion Loss :<0.3 dB
- b. Return loss > 50 dB
- c. Ferrule End-face Radius : 10 < R < 30mm
- d. Apex Offset: < 50um
- e. Increase in insertion loss after 500 mating:0.2 dB Max.
- f. Operation Temperature :-20" to +70"
- g. Storage Temperature :-40" to +80"

| UNIT | | TITLE | VERSION | |
|--|--|---|----------|-------------|
| mm | | DELTAO fiberkablage SC - SC, duplex, singlemode ,XXmeters | 1.0 | |
| unless otherwise stated Tolerances mm XXX.XX ±0.3 angular XX.XX ±0.2 X.XX ±0.1 | | P/N. | DRAWN BY | |
| | | MATERIAL | CHECK BY | |
| | | SCALE | PAGE 1/1 | APPROVAL BY |