


VERSION	DESCRIPTION	DRAWN/DATE	CHECK/DATE	APPROVAL/DATE
1.0	NEW RELEASE	Lei/2011/05/09	Michael/2011/05/09	Johnson/2011/05/09

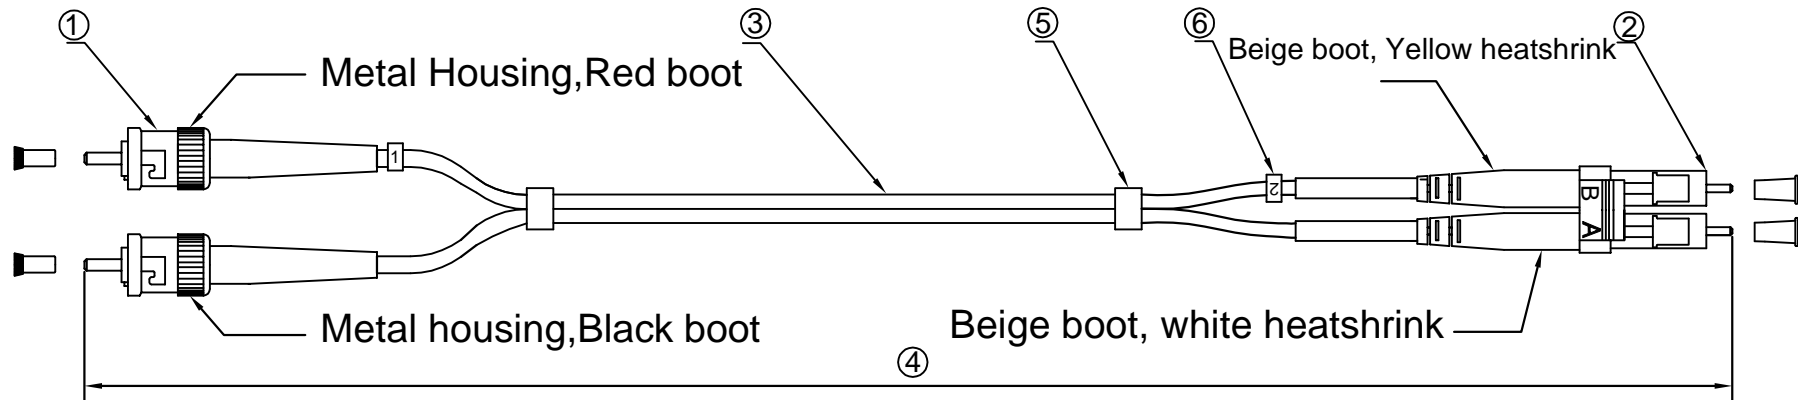

### Specification:

- 1.Connector Type: ST/PC Multimode
- 2.Connector Type: LC/PC Multimode
- 3.Cable Type:  
Zipcord cable,  $\phi$  1.8mm. 50/125um OM3, Multimode,  
Cable Jacket : Aqua color, LSZH material
- 4.Length : xM
- 5.Shrink Tube
- 6.Cable Marker

Part Number	Length
LCST-60	0.5M
LCST-61	1M
LCST-62	2M
LCST-63	3M
LCST-65	5M
LCST-67	7M
LCST-610	10M
LCST-615	15M
LCST-620	20M
LCST-6xx	xxM

### Performance:

- a. Insertion Loss : <0.3 dB
- b. Increase in insertion loss after 500 mating:0.2 dB Max.
- c. Operation Temperature : -20° to +70°
- d. Storage Temperature : -40° to +80°

UNIT		TITLE	VERSION
mm		DELTAACO OM3 fiberkabel LC - ST, duplex, multimode, 50/125,XXmeters	1.0
unless otherwise stated Tolerances mm XXX.XX ±0.3 XX.XX ±0.2 X.XX ±0.1 angular ±2°		P/N.	DRAWN BY Leinazi
		MATERIAL	CHECK BY Michael
		SCALE	APPROVAL BY Johnson
		PAGE	1/1